


19.04.2024

1 / 1

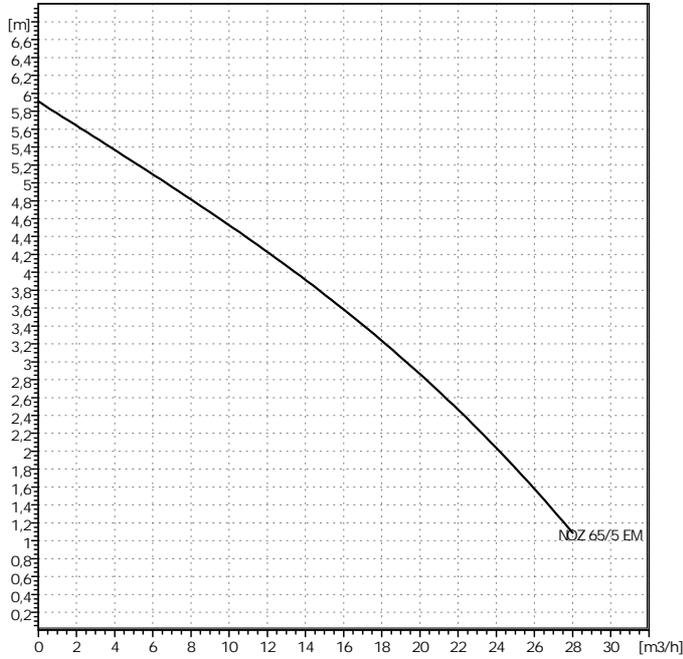


0	m ³ /h
0	m
20	°C
998,3	kg/m ³
1,005	mm ² /s
2,337	kPa

NOZ 65/5 EM

1
PN10

2	°C
110	°C

()	m ³ /h
	m

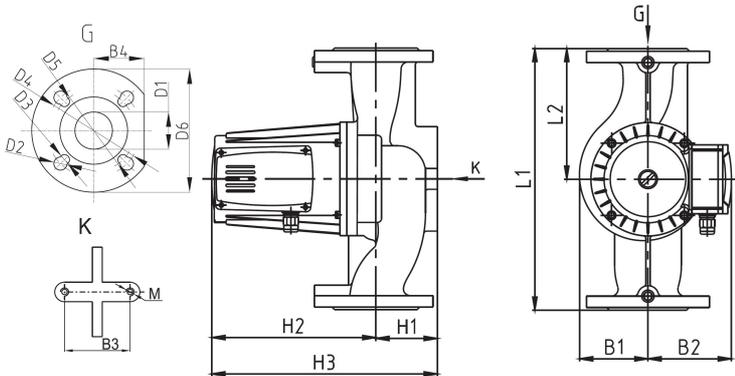

SiC
SiC
Silicon Carbide

mm							
H1	78	B1	88	D2	17,5	M	10
H2	232	B2	154	D3	13,5		
H3	310	B3	90	D4	145		
L1	280	B4	76	D5	130		
L2	140	D1	65	D6	180		

DNs DN 65 / PN10
DNd DN 65 / PN10
18 kg

2	0,266	kW
P1	0,7	kW
	2900	1/min
	1-230 V,50 Hz	
	3,4	A
	IP 44	
	+/- 10%	

2479440