


19.04.2024

1 / 1

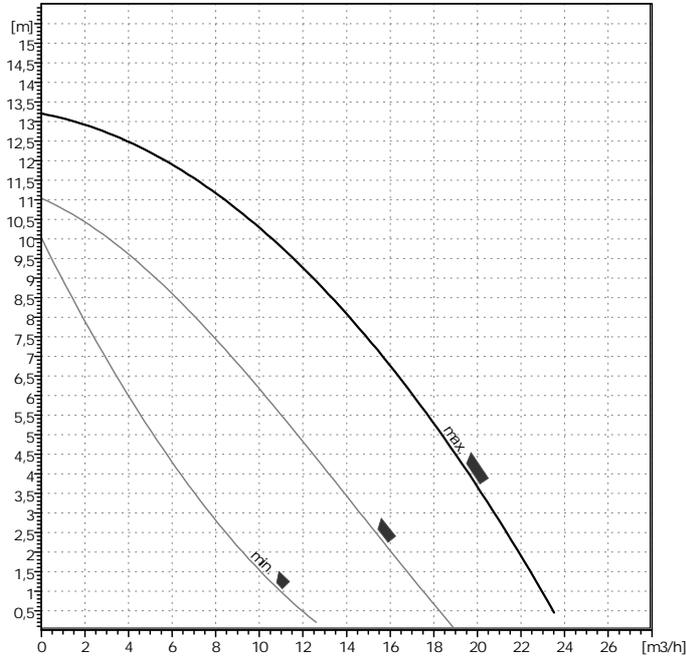


0	m ³ /h
0	m
20	°C
998,3	kg/m ³
1,005	mm ² /s
2,337	kPa

NOZ 50/12 DM

1
PN10

2	°C
110	°C

()	m ³ /h
		m

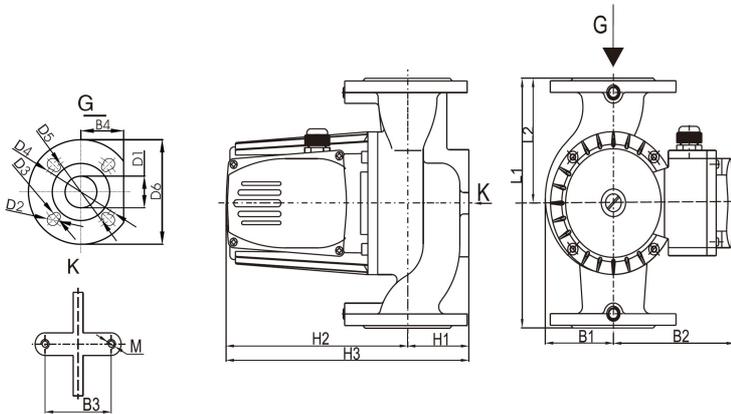

1
c
Silicon Carbide

mm							
H1	72	B1	88	D2	17,5	M	10
H2	232	B2	154	D3	13,5		
H3	304	B3	90	D4	125		
L1	280	B4	75	D5	110		
L2	140	D1	50	D6	165		

DNs	DN 50	/ PN10
DNd	DN 50	/ PN10
	17,5	kg

2	0,4	kW
P1	1	kW
	2900	1/min
	3~400 V,50 Hz	
	1,6	A
	IP 44	
	+/- 10%	

2479404