
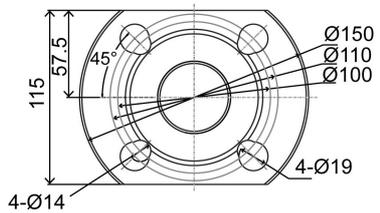
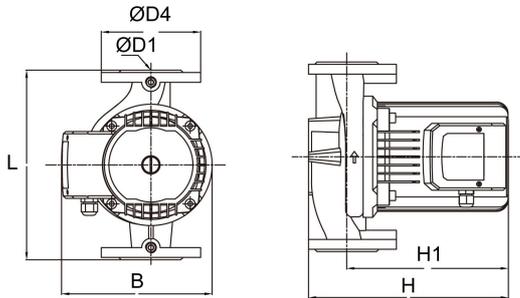


19.04.2024

1 / 1

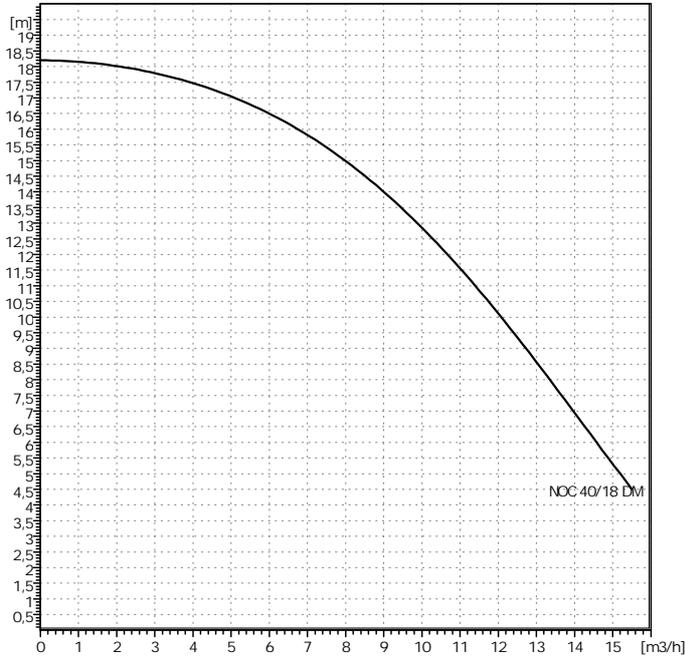

| | |
|-------|--------------------|
| 0 | m ³ /h |
| 0 | m |
| 20 | °C |
| 998,3 | kg/m ³ |
| 1,005 | mm ² /s |
| 2,337 | kPa |

NOC 40/18 DM

1
PN10

| | |
|-----|----|
| 2 | °C |
| 110 | °C |

| | | |
|---|---|-------------------|
| (|) | m ³ /h |
| | | m |

| |
|----|
| °C |
| m |

2Cr13

Silicon Carbide

mm

| | | | | | | | |
|----|-----|----|-----|--|--|--|--|
| L | 250 | D4 | 150 | | | | |
| B | 196 | | | | | | |
| H | 269 | | | | | | |
| H1 | 210 | | | | | | |
| D1 | 40 | | | | | | |

| | | |
|-----|-------|--------|
| DNs | DN 40 | / PN10 |
| DNd | DN 40 | / PN10 |
| | 18,5 | kg |

| | | |
|----|------------|-------|
| 2 | 0,85 | kW |
| P1 | 1,3 | kW |
| | 2850 | 1/min |
| | 3-380 V,50 | Hz |
| | 2,9 | A |
| | IP 44 | |
| | +/- 10% | |

2478489