


19.04.2024

1 / 1

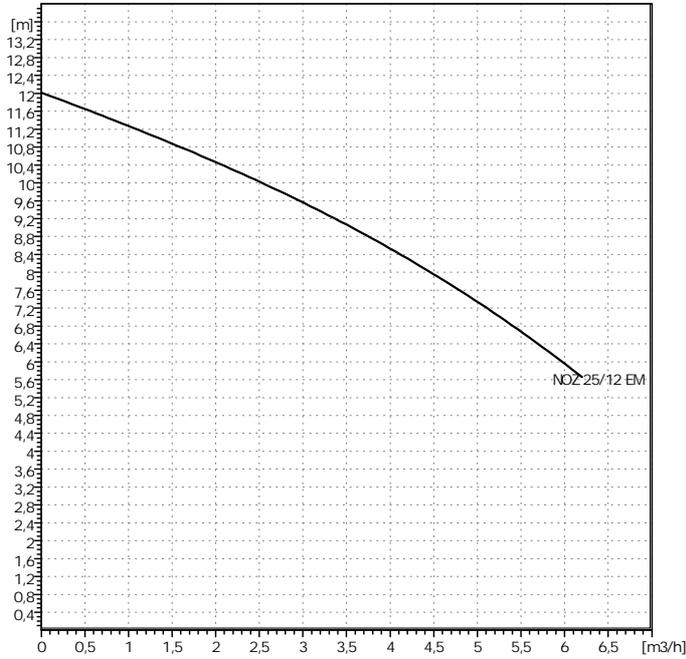


| | |
|-------|-------|
| 0 | m³/h |
| 0 | m |
| 20 | °C |
| 998,3 | kg/m³ |
| 1,005 | mm²/s |
| 2,337 | kPa |

NOZ 25/12 EM

1
PN10

| | |
|-----|----|
| 2 | °C |
| 110 | °C |

| | |
|-----|------|
| () | m³/h |
| | m |

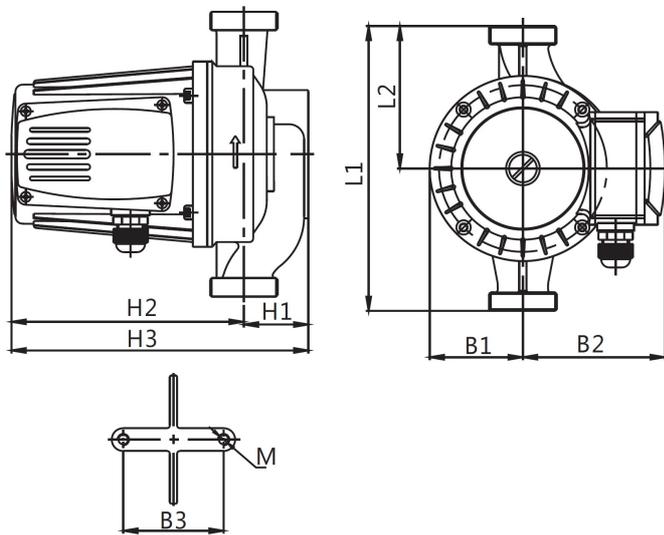

Ceramic

Ceramic

mm

| | | | | | | | | | |
|----|-----|----|----|--|--|--|--|--|--|
| H1 | 45 | B1 | 65 | | | | | | |
| H2 | 162 | B2 | 99 | | | | | | |
| H3 | 207 | B3 | 70 | | | | | | |
| L1 | 200 | M | 8 | | | | | | |
| L2 | 100 | | | | | | | | |

DNs Rp 1 1/2 / PN10
 DNd Rp 1 1/2 / PN10
 6,6 kg

| | | |
|----|------------|-------|
| 2 | 0,099 | kW |
| P1 | 0,3 | kW |
| | 2900 | 1/min |
| | 1-230 V,50 | Hz |
| | 1,5 | A |
| | IP 44 | |
| | +/- 10% | |

2479388